
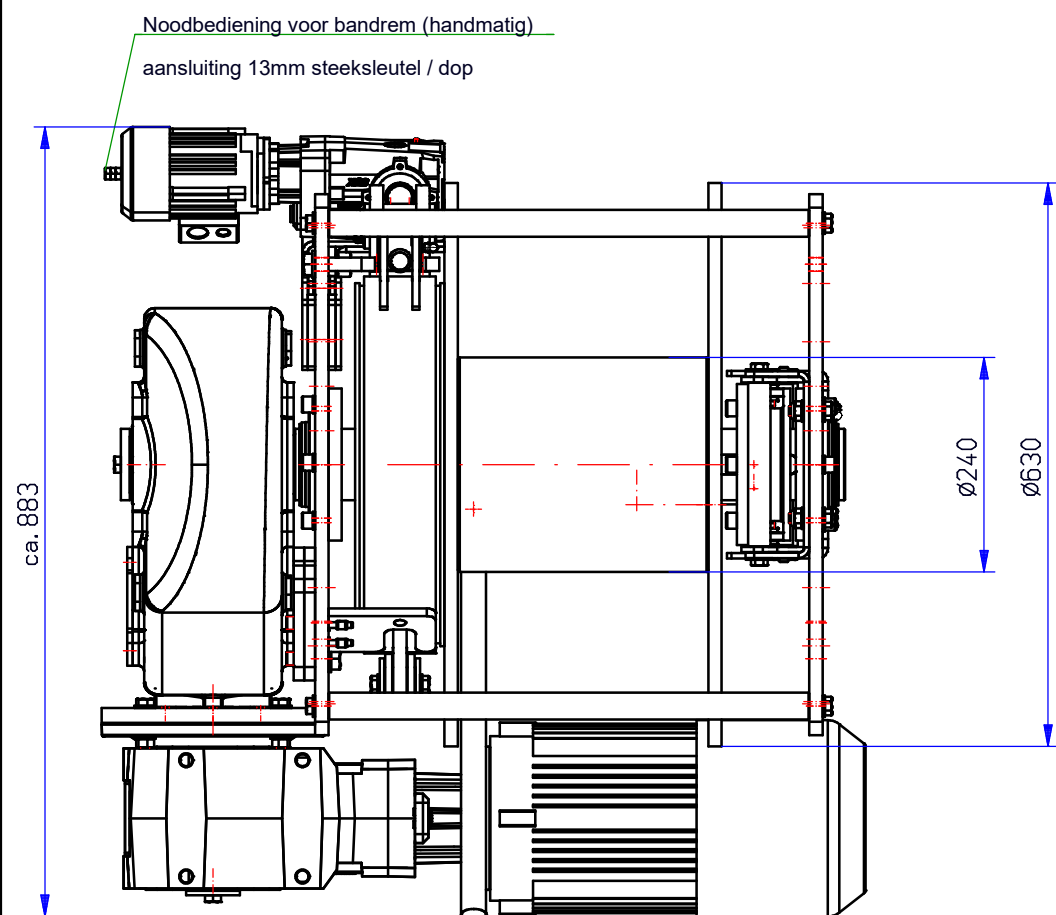
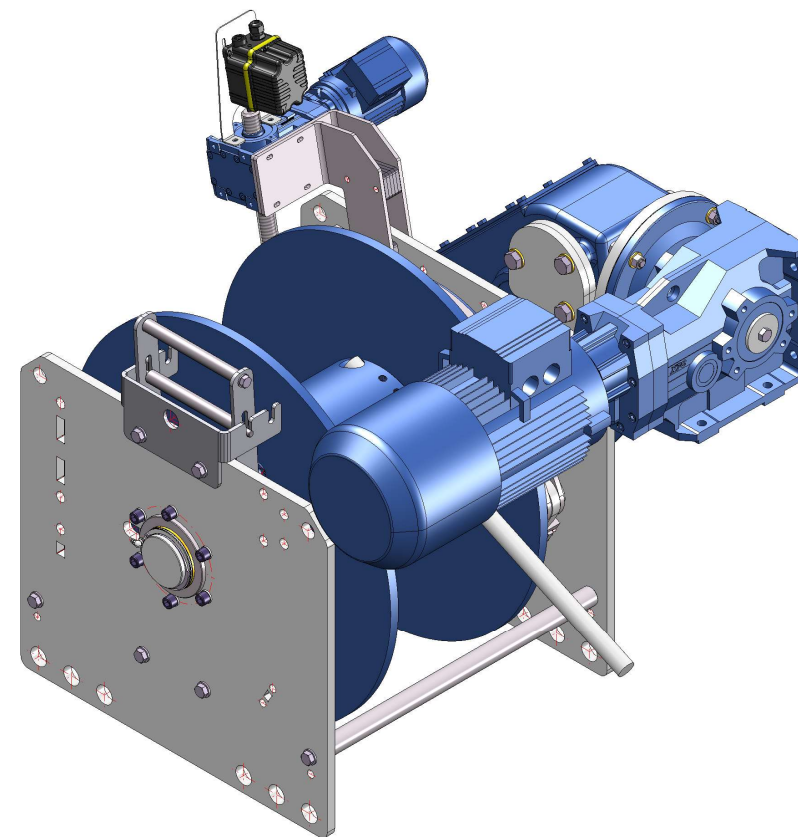


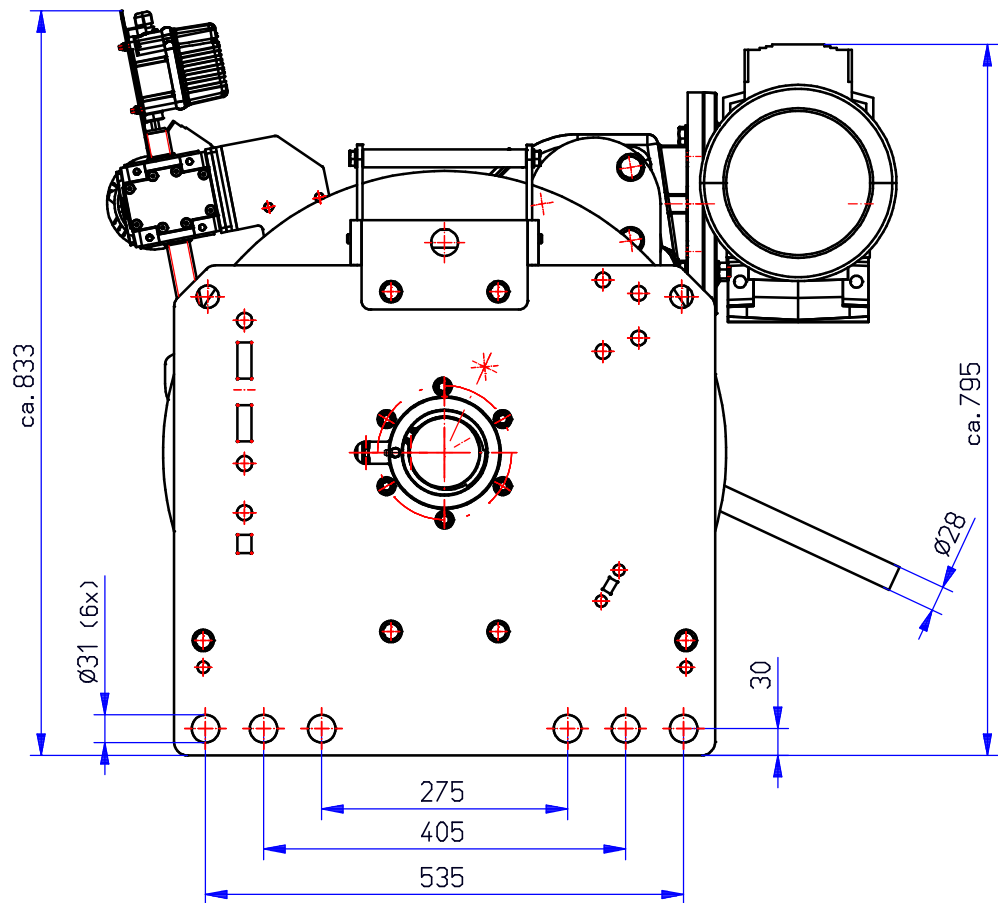

Lierspecificaties	
Type	: Elektrische ankerlier ECA-5500-KB
Werklast (WLL)	: 5500 kg op laag 1
Houdkracht	: 15000 kg op laag 1
Inhaalsnelheid	: 9.5 m/min op laag 1
Trommel	: ø240 x 280 mm
Kabelberging	: 70 meter ø28 mm op 6 lagen + 3 veiligheidswindingen
Motorvermogen	: 11kW S2-10min
Voeding	: 400V 50Hz
Beschermklasse	: IP56
Rem	: Fail safe rem op de motor 150% WLL
Conservering	: 3-laags coating RAL5010
	: Plaatwerk zink/nikkel Protalloy
Inclusief opties	: Handbediende RVS vrijlooppkoppeling
	: Elektrische bandrembediening met noodbediening
Gebruiksklasse	: T5-L2-M5 (vlgs FEM 1.001 en ISO 4301/1)
Gebruikstemperatuur	: -10° tot +40° Celsius

LET OP : Verzeizingsafstand min. 5 meter vanaf hartlijn trommel tot
: hartlijn 1e schijf, uitgaande van links/rechts geslagen kabel,
: indien geen andere compenserende maatregelen genomen zijn.

Datum:

Naam klant:

Goedgekeurd voor productie:

To Check

STATUS:		TITLE: ECA-5500-KB					DRAWING - REV.No: DLA-127			
DROMECC WINCHES		DRAWN BY: PM		SHEET: 1		D				
		CHECKED BY:				C				
www.dromecc.nl +31(0)317-681155		UNIT OF MEASURE: mm		Am. PR:		B				
		FORMAT: A2				A				
		SCALE: 1:6				REV		TEXT		DATE
		DATE: 28.02.2023		COMMENT: Scherpe kanten breken						
Tolerances according to ISO 2768-mL, unless stated otherwise around welding a = 1/2 x thinnest sheet thickness +1. Copyright Dromec bv - Notifications to third parties are only permitted with written permission.										